

Withdrawable circuit breaker with guide frame, IEC 60947-2, frame size 1, 4-poles, N-pole left,  $I_n=800\text{A}$  up to 690V AC 50/60Hz, breaking capacity S  $I_{cu}=66/50\text{kA}$  at 500/690V, Trip unit ETU300 LSI optimized for standard applications, without display Protection LT, ST, INST, include N-protection, (internal N-sensor available), incl. trip alarm switch (1xCO), rear connection horizontal, guide frame with shutter and w/o position signalling switch, without Com & metering function Manual operating mechanism with mechanical closing, without Spring charging motor, Ready-to-close signal. switch, Auxiliary switches 2NO+2NC, without Closing coil (CC), manual operating mechanism with mechanical closing, without Remote trip alarm reset coil (RR), without 2nd shunt trip, without 1st Shunt trip

Model	
product brand name	SENTRON
product designation	Air circuit breaker
suitability for use	circuit breaker
size of the circuit-breaker	I
number of poles	4
position / of neutral conductor	neutral left
fastening method	withdrawable circuit breaker
design of the product	AC application
type of the driving mechanism	manual operating mechanism with mechanical or electrical closing
design of the electronic trip unit	ETU300 LSI
Weight	86.1 kg
Net Weight	73.1 kg
General technical data	
insulation voltage / rated value	1000 V
operating voltage / at AC / at 50/60 Hz / rated value	690 V
power loss [W] / maximum	85 W
Current	
continuous current / rated value / maximum	800 A
continuous current / rated value	800 A
operational current	
• at 40 °C / rated value	800 A
• at 45 °C / rated value	800 A
• at 50 °C / rated value	800 A
• at 55 °C / rated value	800 A
• at 60 °C / rated value	800 A
• at 65 °C / rated value	800 A
• at 70 °C / rated value	800 A
Switching capacity and short-time withstand current, according to IEC 60947-2	
switching capacity class of the circuit breaker	S
maximum short-circuit current breaking capacity ( $I_{cu}$ )	
• at 500 V / rated value	66 kA
• at 690 V / rated value	50 kA
operating short-circuit current breaking capacity ( $I_{cs}$ )	
• at 500 V / rated value	66 kA
• at 690 V / rated value	50 kA
short-circuit current making capacity ( $I_{cm}$ )	
• at 500 V / rated value	145 kA
• at 690 V / rated value	105 kA
short-time withstand current ( $I_{cw}$ ) / at 500 V AC	

<ul style="list-style-type: none"> <li>• for 0.5 s / rated value</li> </ul>	66 kA
<ul style="list-style-type: none"> <li>• for 1 s / rated value</li> </ul>	66 kA
<ul style="list-style-type: none"> <li>• for 2 s / rated value</li> </ul>	45 kA
<ul style="list-style-type: none"> <li>• for 3 s / rated value</li> </ul>	35 kA
short-time withstand current (I <sub>cw</sub> ) / at 690 V AC	
<ul style="list-style-type: none"> <li>• for 0.5 s / rated value</li> </ul>	50 kA
<ul style="list-style-type: none"> <li>• for 1 s / rated value</li> </ul>	50 kA
<ul style="list-style-type: none"> <li>• for 2 s / rated value</li> </ul>	45 kA
<ul style="list-style-type: none"> <li>• for 3 s / rated value</li> </ul>	35 kA
<b>Electronic release unit</b>	
product feature	
<ul style="list-style-type: none"> <li>• upgradable</li> </ul>	No
<ul style="list-style-type: none"> <li>• Bluetooth and USB interface</li> </ul>	No
<ul style="list-style-type: none"> <li>• decoder for basic protection functions</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• display and function keys</li> </ul>	No
<ul style="list-style-type: none"> <li>• SENTRON powerconfig configuration software</li> </ul>	No
<b>Basic protection functions</b>	
product feature / for L-tripping	
<ul style="list-style-type: none"> <li>• can be switched on/off</li> </ul>	No
<ul style="list-style-type: none"> <li>• selectable characteristic function</li> </ul>	No
<ul style="list-style-type: none"> <li>• decoder and infinite adjustability are selectable with eSet</li> </ul>	No
set values setting current (I <sub>r</sub> ) / for L-tripping / with I <sub>2t</sub> characteristic	0.4;0.5;0.6;0.7;0.75;0.8;0.85;0.9;0.95;1.0
reference value setting current (I <sub>r</sub> ) / for L-tripping / with I <sub>2t</sub> characteristic	x I <sub>n</sub>
set values delay time (t <sub>r</sub> ) / for L-tripping / with I <sub>2t</sub> characteristic	0.75;1;2;5;8;10;14;17;21;25
reference value delay time (t <sub>r</sub> ) / for L-tripping / with I <sub>2t</sub> characteristic	s
<b>L: Overload protection N-conductor</b>	
product feature / with neutral conductor protection / can be switched on/off	No
setting values setting current (I <sub>nN</sub> ) / for N-tripping	1
reference value setting current (I <sub>nN</sub> ) / for N-tripping	x I <sub>n</sub>
<b>S: delayed short-circuit protection ST</b>	
product feature / for S-tripping	
<ul style="list-style-type: none"> <li>• independent of direction / can be switched on/off</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• independent of direction / selectable characteristic function</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• decoder and infinite adjustability are selectable with eSet</li> </ul>	No
<b>S: delayed short-circuit protection ST, settings values I<sub>0t</sub></b>	
set values setting current (I <sub>sd</sub> ) / for S-tripping / with I <sub>0t</sub> characteristic	1.5;2;2.5;3;4;5;6;8;10
reference value setting current (I <sub>sd</sub> ) / for S-tripping / with I <sub>0t</sub> characteristic	x I <sub>r</sub>
set values delay time (t <sub>sd</sub> ) / for S-tripping / with I <sub>0t</sub> characteristic	0.08;0.15;0.22;0.3;0.4
reference value delay time (t <sub>sd</sub> ) / for S-tripping / with I <sub>0t</sub> characteristic	s
<b>S: delayed short-circuit protection ST, settings values I<sub>2t</sub></b>	
set values setting current (I <sub>sd</sub> ) / for S-tripping / with I <sub>2t</sub> characteristic	1.5;2;2.5;3;4;5;6;8;10
reference value setting current (I <sub>sd</sub> ) / for S-tripping / with I <sub>2t</sub> characteristic	x I <sub>r</sub>
set values delay time (t <sub>sd</sub> ) / for S-tripping / with I <sub>2t</sub> characteristic	0.08;0.15;0.22;0.3;0.4
product feature / for I-tripping	
<ul style="list-style-type: none"> <li>• can be switched on/off</li> </ul>	No
<ul style="list-style-type: none"> <li>• decoder and infinite adjustability are selectable (with eSet)</li> </ul>	No
set values setting current (I <sub>i</sub> ) / for I-tripping	1.5;2;3;4;5;6;8;10;12;15
reference value setting current (I <sub>i</sub> ) / for I-tripping	x I <sub>n</sub>
<b>G: ground fault GF</b>	
product feature / for G-tripping	
<ul style="list-style-type: none"> <li>• can be switched on/off</li> </ul>	No
<ul style="list-style-type: none"> <li>• selectable characteristic function</li> </ul>	No
<b>Further protective functions</b>	

protection function	
• maintenance mode DAS+	Yes
<b>Measuring functions</b>	
measurement function	
• current measurement	Yes
<b>Communication</b>	
communication function	No
<b>Service Life</b>	
mechanical service life (operating cycles)	
• without support / typical	15000
• with support / typical	30000
electrical endurance (operating cycles)	
• at 690 V / without support / typical	10000
• at 690 V / with support / typical	30000
<b>Dimensions</b>	
height	468 mm
width	410 mm
depth	471 mm
<b>Main connection</b>	
arrangement of electrical connectors / for main current circuit	main connection on the rear, horizontal
<b>Auxiliary circuit</b>	
design of the auxiliary switch	2 NO + 2 NC
number of NC contacts / for auxiliary contacts	2
number of NO contacts / for auxiliary contacts	2
number of CO contacts / for auxiliary contacts	0
<b>Internal accessories</b>	
product component	
• undervoltage release	No
• voltage trigger	No
• trip indicator	Yes
• motor drive	No
<b>Environmental conditions</b>	
protection class IP / on the front	IP20
ambient temperature / during operation	
• minimum	-40 °C
• maximum	70 °C
ambient temperature / during storage	
• minimum	-40 °C
• maximum	80 °C
<b>Certificates</b>	
reference code	
• according to IEC 81346-2	Q
<b>General Product Approval</b>	



[Confirmation](#)



EMV	Radio Equipment Type Approval Certificate	Test Certificates	Marine / Shipping
-----	---	-------------------	-------------------



[Miscellaneous](#)

[Special Test Certificate](#)

[Miscellaneous](#)



Marine / Shipping	other	Dangerous goods	Environment
-------------------	-------	-----------------	-------------



[Confirmation](#)

[Manufacturer Declaration](#)

[Transport Information](#)



## Environment



## Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA1108-3AB42-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WA1108-3AB42-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3WA1108-3AB42-0AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA1108-3AB42-0AA0)


CAX-Online-Generator

<http://www.siemens.com/cax>

Information- and Downloadcenter (catalogues, leaflets,...)

<http://www.siemens.com/energy-automation>

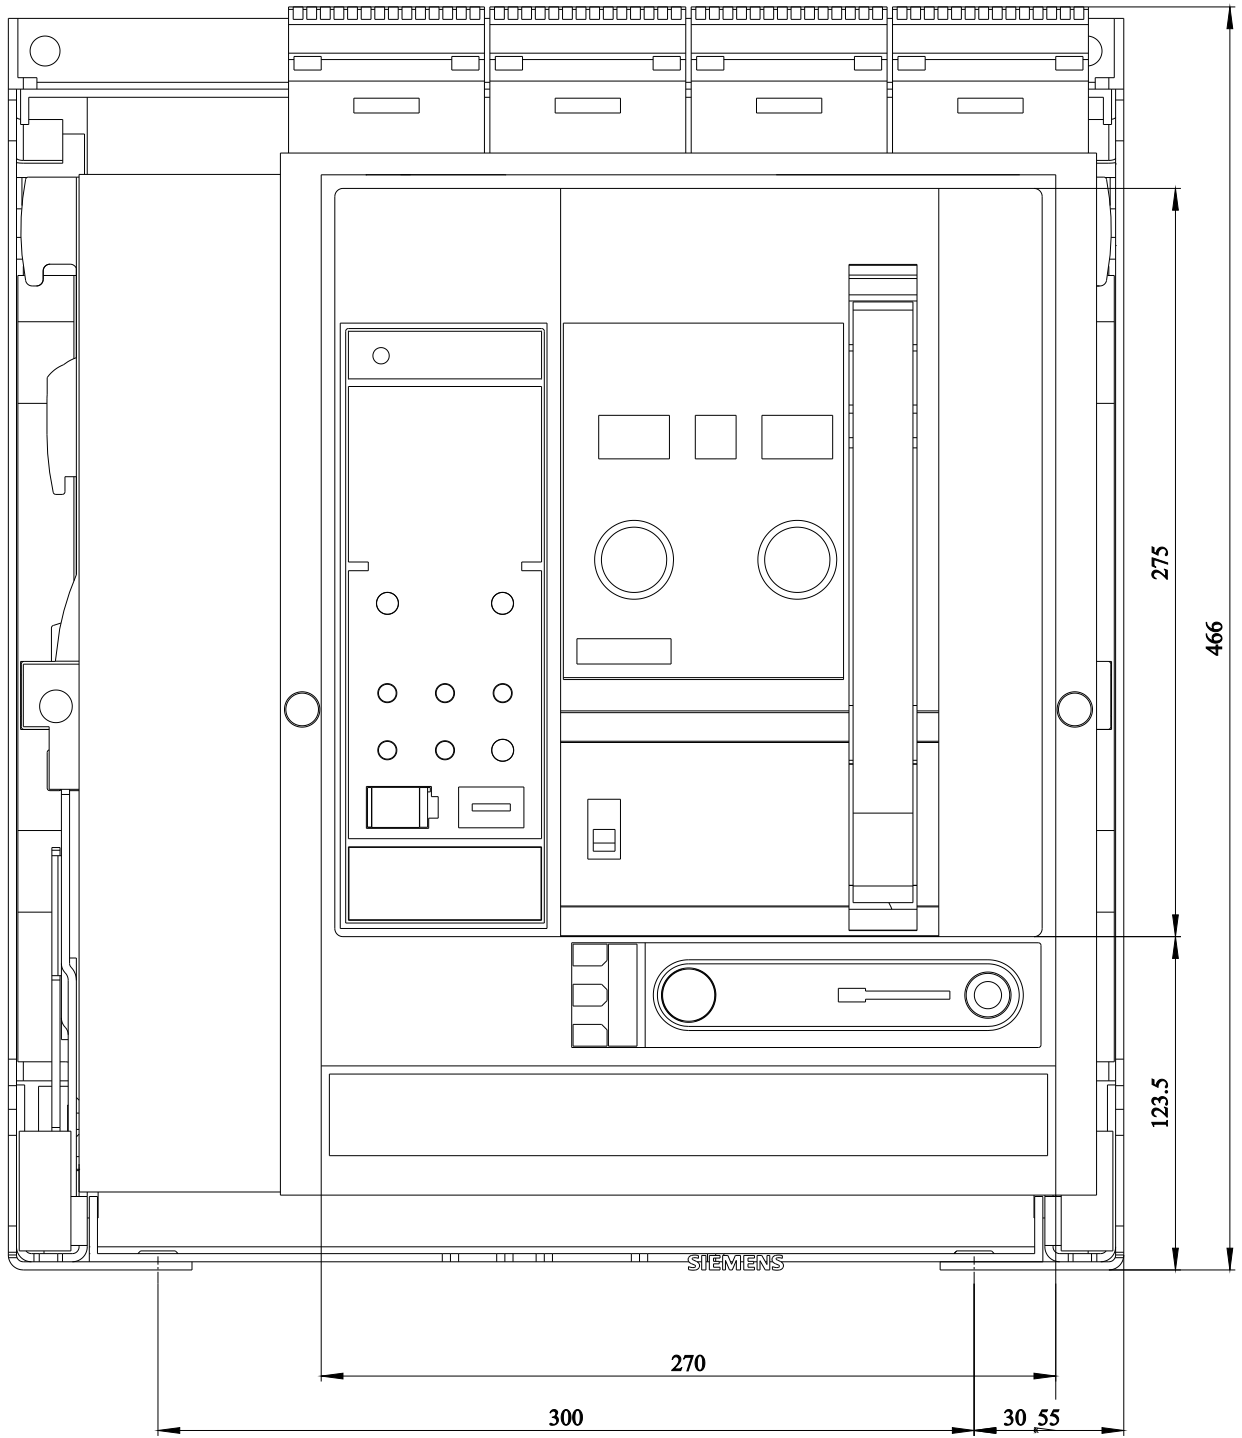

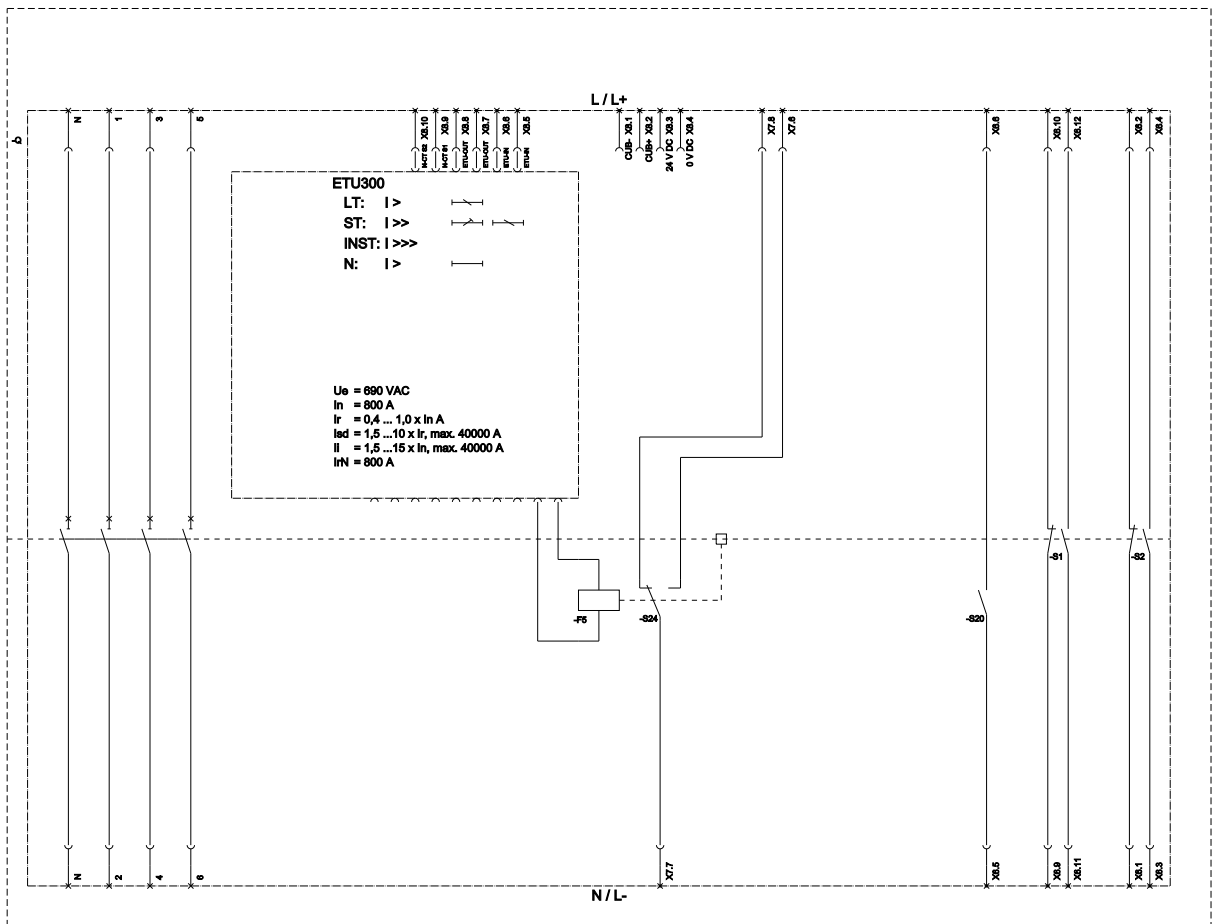

LT (Long Time Delay / Übersetzschutz); ST (Short Time Delay / Kurzschlussschutz, kurzzeitverzögerter); INST (Instantaneous / Kurzschlusschutz, unverzögerter); N (Neutral Protection / Neutralfehlschutz); GF (Ground Fault Protection / Erdfehlschutz);  
 PS (Signal for trip unit / Auslösesignale); S04 (TAS: In trip alarm switch / Fehler Anzeigebestätigungsschalter (Alarm Position)); S1-S3 (ALICE: Auxiliary switch / Hilfschalter); S20 (RTCC: Ready to close signaling switch / Abschaltbereitschaftsschalter);  
 FRS: position signaling switch module / Positionsschaltmodule

last modified:

12/13/2023

