



Auxiliary switch, Front installation 1 OE + 1 S left and / or right mountable, accessory for Load disconnecter 3LD3

Model	
product brand name	SENTRON
product designation	auxiliary switch
design of the product	accessories for 3LD3 switch disconnectors
operational current	<ul style="list-style-type: none"> at AC-15 at 110 V rated value 6 A at AC-15 at 230 V rated value 3 A at AC-15 at 500 V rated value 1.4 A at DC-13 at 24 V rated value 4 A
suitability for use	for 3LD3 front mounting
special product feature	NO: lagging during switching ON, leading during switching OFF the 3LD switch. NC: leading during switching ON, lagging during switching OFF the 3LD switch
tightening torque with screw-type terminals	<ul style="list-style-type: none"> minimum 0.8 N·m maximum 1.2 N·m
type of connectable conductor cross-sections for auxiliary contacts	<ul style="list-style-type: none"> solid 2x (0.75-2.5 mm²), 1x 4 mm² finely stranded with core end processing 2x (0.75-2.5 mm²), 1x 4 mm² stranded 2x (0.75-2.5 mm²), 1x 4 mm²

Approvals Certificates	
General Product Approval	other



[Confirmation](#)



[Miscellaneous](#)

[Confirmation](#)

Environment

[Environmental Conformations](#)

[Environmental Conformations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
 Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3LD9340-6B>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3LD9340-6B>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD9340-6B

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

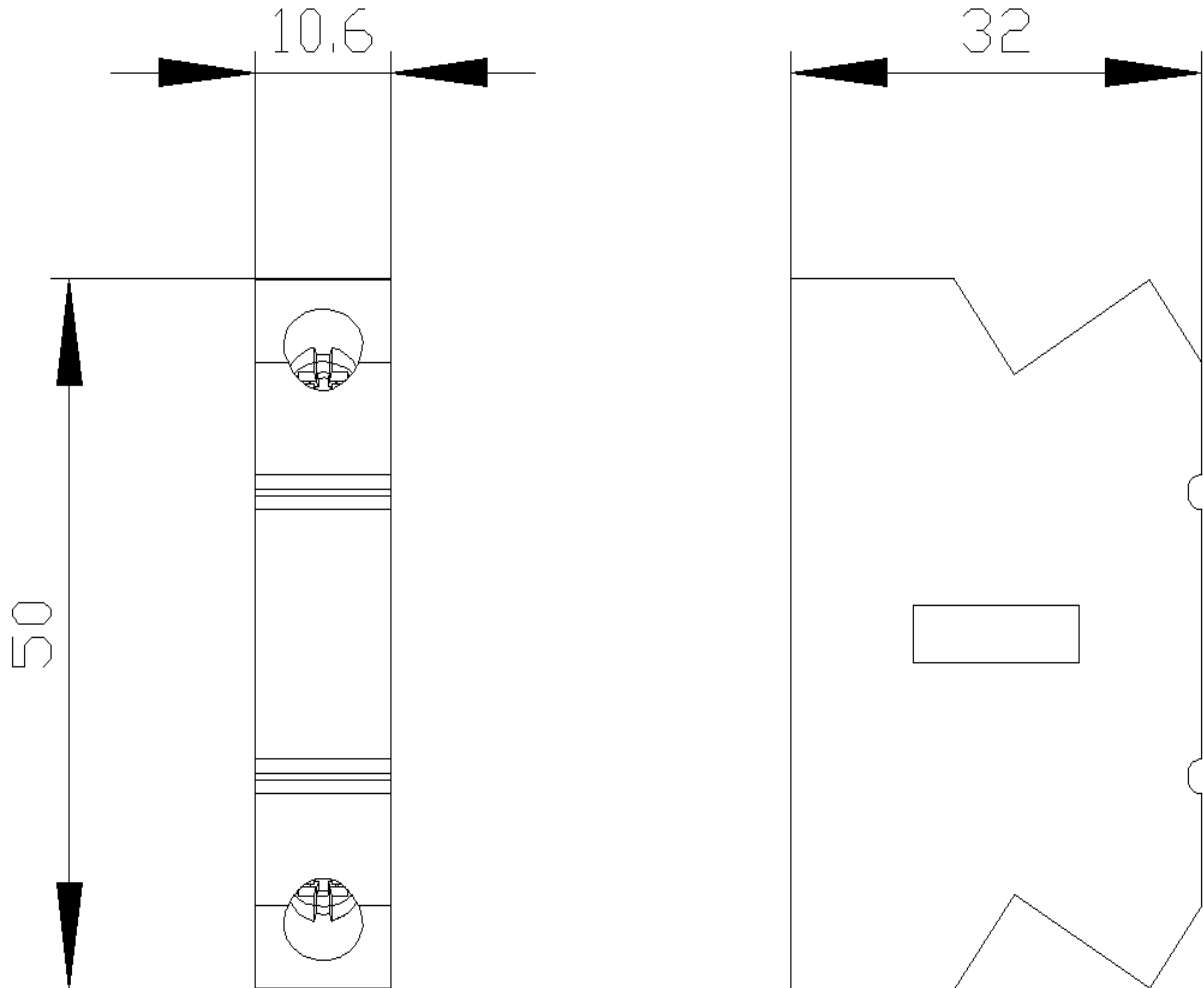

last modified:

8/8/2024 

