



RCBO, 6 kA, 2P Type A, 30 mA, B-Char, In: 20A Un: 230V

Model	
product brand name	SENTRON
product designation	RCBO
design of the product	Instantaneous
General technical data	
number of poles	2
number of poles with protection	2
design of pole	2P
tripping characteristic class	B
mechanical service life (operating cycles) typical	10 000
overvoltage category	III
degree of pollution	3
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui) rated value	500 V
surge voltage resistance rated value	4 000 V
surge current resistance at (8/20) $\mu$ s	0.25 kA
tripping fault current rated value	30 mA
operational current	
• at 30 °C rated value	20 A
• at 40 °C rated value	19.5 A
• at 45 °C rated value	19.2 A
• at 50 °C rated value	18.9 A
• at 55 °C rated value	18.7 A
• at 60 °C rated value	18.4 A
• at 70 °C rated value	17.8 A
• at AC rated value	20 A
residual current type	A
Supply voltage	
supply voltage	
• at AC rated value	230/240 V
• for testing equipment minimum	195 V
operating frequency	50 Hz
supply voltage frequency rated value	50 Hz
Protection class	
protection class IP	IP20, if the distribution board is installed, with connected conductors
Breaking Capacity	
short-circuit current breaking capacity (Icn) according to EN 61009-1 rated value	6 kA
switching capacity current	

<ul style="list-style-type: none"> <li>• according to EN 60898 rated value</li> </ul>	6 kA
<ul style="list-style-type: none"> <li>• according to IEC 60947-2 rated value</li> </ul>	7.5 kA
<b>rated residual switching capacity (I<math>\Delta</math>m) according to IEC 61009-1</b>	4.5 kA
<b>energy limitation class</b>	3

#### Dissipation

<b>power loss [W]</b>	
<ul style="list-style-type: none"> <li>• for rated value of the current at AC in hot operating state per pole</li> </ul>	1.36 W
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	2.7 W

#### Product details

<b>product feature touch protection</b>	Yes
product component neutral conductor switching	Yes
<b>product feature</b>	
<ul style="list-style-type: none"> <li>• halogen-free</li> </ul>	No

#### Connections

<b>connectable conductor cross-section solid</b>	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	1 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	35 mm <sup>2</sup>
<b>connectable conductor cross-section stranded</b>	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	1 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	35 mm <sup>2</sup>
<b>connectable conductor cross-section finely stranded with core end processing</b>	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	1 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	35 mm <sup>2</sup>
<b>tightening torque with screw-type terminals</b>	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	2 N·m
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	2 N·m
<b>position of power supply cord</b>	Either top or bottom

#### Mechanical Design

<b>height</b>	85 mm
<b>width</b>	36 mm
<b>depth</b>	72 mm
<b>installation depth</b>	70 mm
<b>number of modular width units</b>	2
<b>mounting position</b>	any
<b>net weight</b>	246 g
<b>weight with packaging</b>	282 g

#### Environmental conditions

<b>influence of the surrounding temperature</b>	Max. 95% humidity
<b>ambient temperature during operation</b>	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	-25 °C
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	40 °C
<b>ambient temperature during storage</b>	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	-40 °C
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	70 °C
<b>number of test cycles for environmental testing according to IEC 60068-2-30</b>	28

#### Approvals Certificates

General Product Approval	other
--------------------------	-------



[Miscellaneous](#)



[Confirmation](#)



other	Dangerous goods	Environment
-------	-----------------	-------------

[Miscellaneous](#)

[Miscellaneous](#)

[Transport Information](#)

[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)

## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SU1326-6FP20>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SU1326-6FP20>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SU1326-6FP20](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SU1326-6FP20)

### CAX-Online-Generator

<http://www.siemens.com/cax>

### Tender specifications

<http://www.siemens.com/specifications>

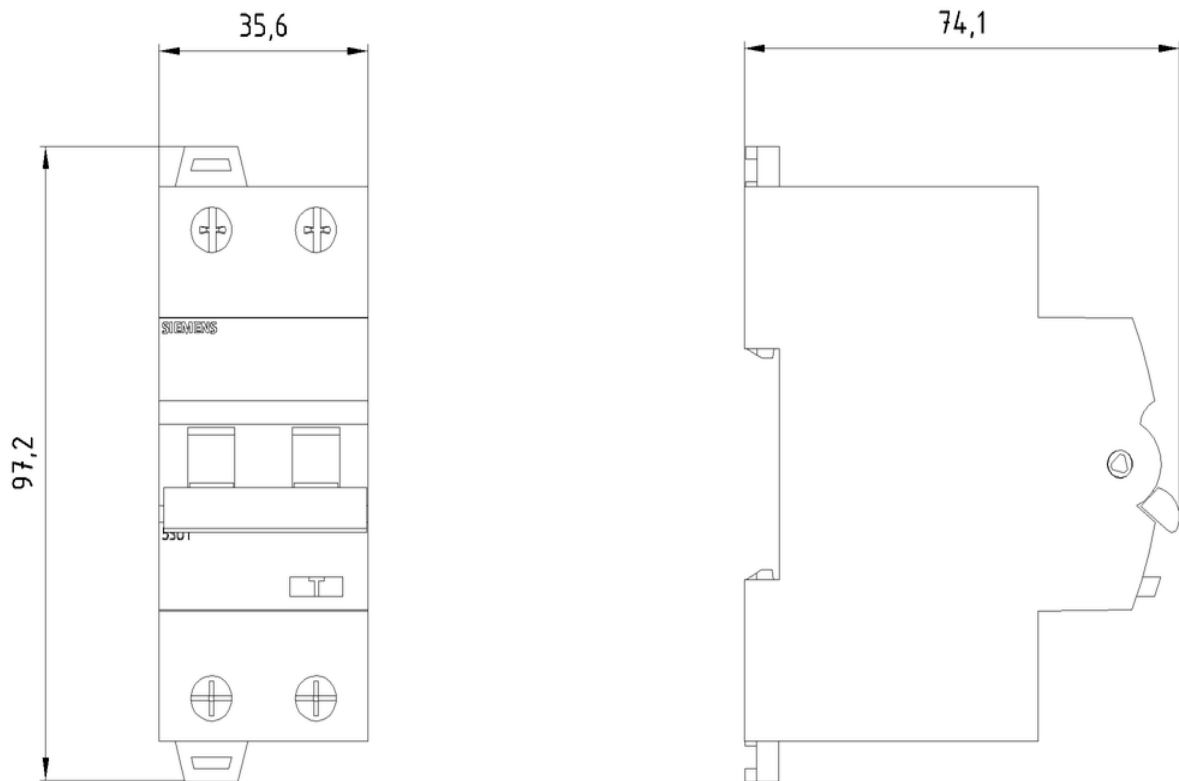

last modified:

4/12/2025



