








Withdrawable circuit breaker with guide frame, IEC 60947-2, frame size 3, 4-poles, N-pole left, $I_n=6300A$ up to 690V AC 50/60Hz, breaking capacity H $I_{cu}=100/85kA$ at 500/690V, Trip unit ETU300 LSI optimized for standard applications, without display Protection LT, ST, INST, include N-protection, (internal N-sensor available), incl. trip alarm switch (1xCO), rear connection vertical, guide frame with shutter and w/o position signalling switch, without Com & metering function Manual operating mechanism with mechanical closing, without Spring charging motor, Ready-to-close signal. switch, Auxiliary switches 2NO+2NC, without Closing coil (CC), manual operating mechanism with mechanical closing, without Remote trip alarm reset coil (RR), without 2nd shunt trip, without 1st Shunt trip

Model	
product brand name	SENTRON
product designation	Air circuit breaker
suitability for use	circuit breaker
size of the circuit-breaker	III
number of poles	4
position / of neutral conductor	neutral left
fastening method	withdrawable circuit breaker
design of the product	AC application
type of the driving mechanism	manual operating mechanism with mechanical or electrical closing
design of the electronic trip unit	ETU300 LSI
Weight	234.9 kg
Net Weight	217.9 kg
General technical data	
insulation voltage / rated value	1000 V
operating voltage / at AC / at 50/60 Hz / rated value	690 V
power loss [W] / maximum	1600 W
Current	
continuous current / rated value / maximum	6300 A
continuous current / rated value	6300 A
operational current	
• at 45 °C / rated value	6300 A
• at 55 °C / rated value	5920 A
• at 60 °C / rated value	5810 A
• at 70 °C / rated value	5500 A
Switching capacity and short-time withstand current, according to IEC 60947-2	
switching capacity class of the circuit breaker	H
maximum short-circuit current breaking capacity (I_{cu})	
• at 500 V / rated value	100 kA
• at 690 V / rated value	85 kA
operating short-circuit current breaking capacity (I_{cs})	
• at 500 V / rated value	100 kA
• at 690 V / rated value	85 kA
short-circuit current making capacity (I_{cm})	
• at 500 V / rated value	220 kA
• at 690 V / rated value	187 kA
short-time withstand current (I_{cw}) / at 500 V AC	
• for 0.5 s / rated value	100 kA
• for 1 s / rated value	100 kA
• for 2 s / rated value	100 kA

<ul style="list-style-type: none"> • for 3 s / rated value 	100 kA
short-time withstand current (I_{cw}) / at 690 V AC	
<ul style="list-style-type: none"> • for 0.5 s / rated value 	85 kA
<ul style="list-style-type: none"> • for 1 s / rated value 	85 kA
<ul style="list-style-type: none"> • for 2 s / rated value 	85 kA
<ul style="list-style-type: none"> • for 3 s / rated value 	85 kA
Electronic release unit	
product feature	
<ul style="list-style-type: none"> • upgradable 	No
<ul style="list-style-type: none"> • Bluetooth and USB interface 	No
<ul style="list-style-type: none"> • decoder for basic protection functions 	Yes
<ul style="list-style-type: none"> • display and function keys 	No
<ul style="list-style-type: none"> • SENTRON powerconfig configuration software 	No
Basic protection functions	
product feature / for L-tripping	
<ul style="list-style-type: none"> • can be switched on/off 	No
<ul style="list-style-type: none"> • selectable characteristic function 	No
<ul style="list-style-type: none"> • decoder and infinite adjustability are selectable with eSet 	No
set values setting current (I_r) / for L-tripping / with I2t characteristic	0.4;0.5;0.6;0.7;0.75;0.8;0.85;0.9;0.95;1.0
reference value setting current (I_r) / for L-tripping / with I2t characteristic	x I_n
set values delay time (t_r) / for L-tripping / with I2t characteristic	0.75;1;2;5;8;10;14;17;21;25
reference value delay time (t_r) / for L-tripping / with I2t characteristic	s
L: Overload protection N-conductor	
product feature / with neutral conductor protection / can be switched on/off	No
setting values setting current (I_{nN}) / for N-tripping	1
reference value setting current (I_{nN}) / for N-tripping	x I_n
S: delayed short-circuit protection ST	
product feature / for S-tripping	
<ul style="list-style-type: none"> • independent of direction / can be switched on/off 	Yes
<ul style="list-style-type: none"> • independent of direction / selectable characteristic function 	Yes
<ul style="list-style-type: none"> • decoder and infinite adjustability are selectable with eSet 	No
S: delayed short-circuit protection ST, settings values I0t	
set values setting current (I_{sd}) / for S-tripping / with I0t characteristic	1.5;2;2.5;3;4;5;6;8;10
reference value setting current (I_{sd}) / for S-tripping / with I0t characteristic	x I_r
set values delay time (t_{sd}) / for S-tripping / with I0t characteristic	0.08;0.15;0.22;0.3;0.4
reference value delay time (t_{sd}) / for S-tripping / with I0t characteristic	s
S: delayed short-circuit protection ST, settings values I2t	
set values setting current (I_{sd}) / for S-tripping / with I2t characteristic	1.5;2;2.5;3;4;5;6;8;10
reference value setting current (I_{sd}) / for S-tripping / with I2t characteristic	x I_r
set values delay time (t_{sd}) / for S-tripping / with I2t characteristic	0.08;0.15;0.22;0.3;0.4
product feature / for I-tripping	
<ul style="list-style-type: none"> • can be switched on/off 	No
<ul style="list-style-type: none"> • decoder and infinite adjustability are selectable (with eSet) 	No
set values setting current (I_i) / for I-tripping	1.5;2;3;4;5;6;8;10;12;15
reference value setting current (I_i) / for I-tripping	x I_n
G: ground fault GF	
product feature / for G-tripping	
<ul style="list-style-type: none"> • can be switched on/off 	No
<ul style="list-style-type: none"> • selectable characteristic function 	No
Further protective functions	
protection function	
<ul style="list-style-type: none"> • maintenance mode DAS+ 	Yes
Measuring functions	

measurement function			
• current measurement	Yes		
Communication			
communication function	No		
Service Life			
mechanical service life (operating cycles)			
• without support / typical	7500		
• with support / typical	15000		
electrical endurance (operating cycles)			
• at 690 V / without support / typical	2000		
• at 690 V / with support / typical	15000		
Dimensions			
height	468 mm		
width	914 mm		
depth	471 mm		
Main connection			
arrangement of electrical connectors / for main current circuit	main connection on the rear, vertical		
Auxiliary circuit			
design of the auxiliary switch	2 NO + 2 NC		
number of NC contacts / for auxiliary contacts	2		
number of NO contacts / for auxiliary contacts	2		
number of CO contacts / for auxiliary contacts	0		
Internal accessories			
product component			
• undervoltage release	No		
• voltage trigger	No		
• trip indicator	Yes		
• motor drive	No		
Environmental conditions			
protection class IP / on the front	IP20		
ambient temperature / during operation			
• minimum	-40 °C		
• maximum	70 °C		
ambient temperature / during storage			
• minimum	-40 °C		
• maximum	80 °C		
Certificates			
reference code			
• according to IEC 81346-2	Q		
General Product Approval		Radio Equipment Type Approval Certificate	Test Certificates
			
CCC		EG-Konf.	
		Miscellaneous	Special Test Certificate
Test Certificates	Marine / Shipping	other	
Miscellaneous			
	ABS	BUREAU VERITAS	LRS
		Confirmation	Manufacturer Declaration
Dangerous goods	Environment		



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA1363-5AB41-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WA1363-5AB41-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA1363-5AB41-0AA0


CAX-Online-Generator

<http://www.siemens.com/cax>

Information- and Downloadcenter (catalogues, leaflets,...)

<http://www.siemens.com/energy-automation>

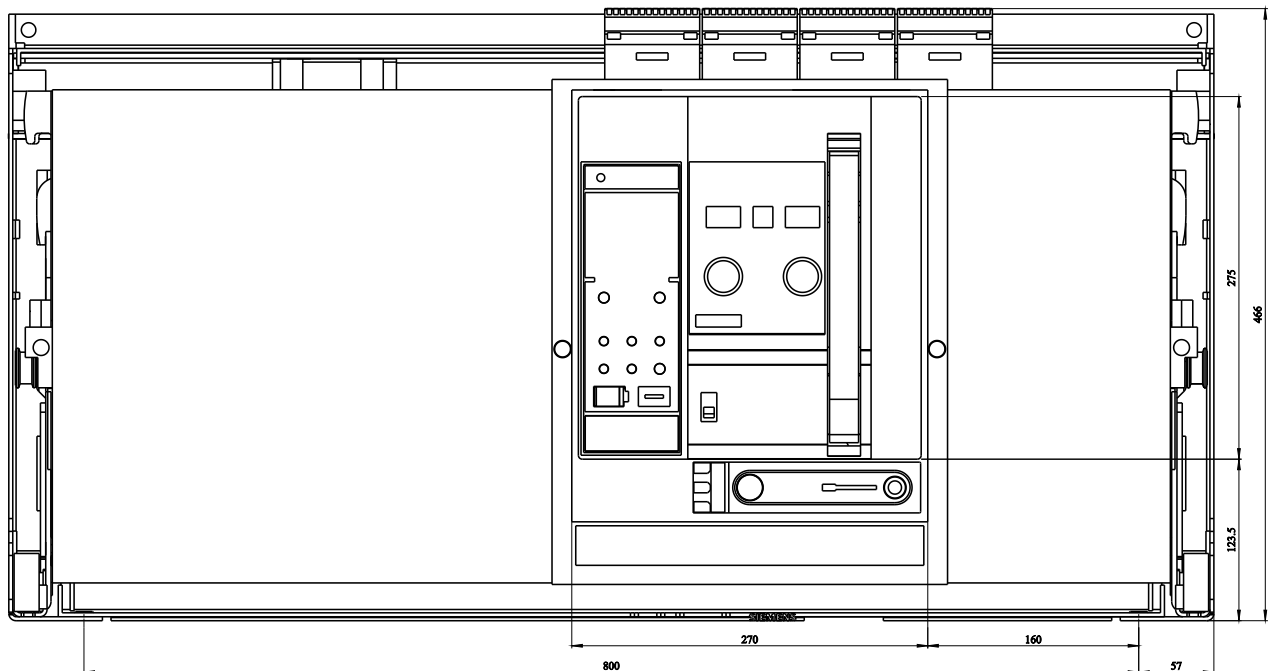

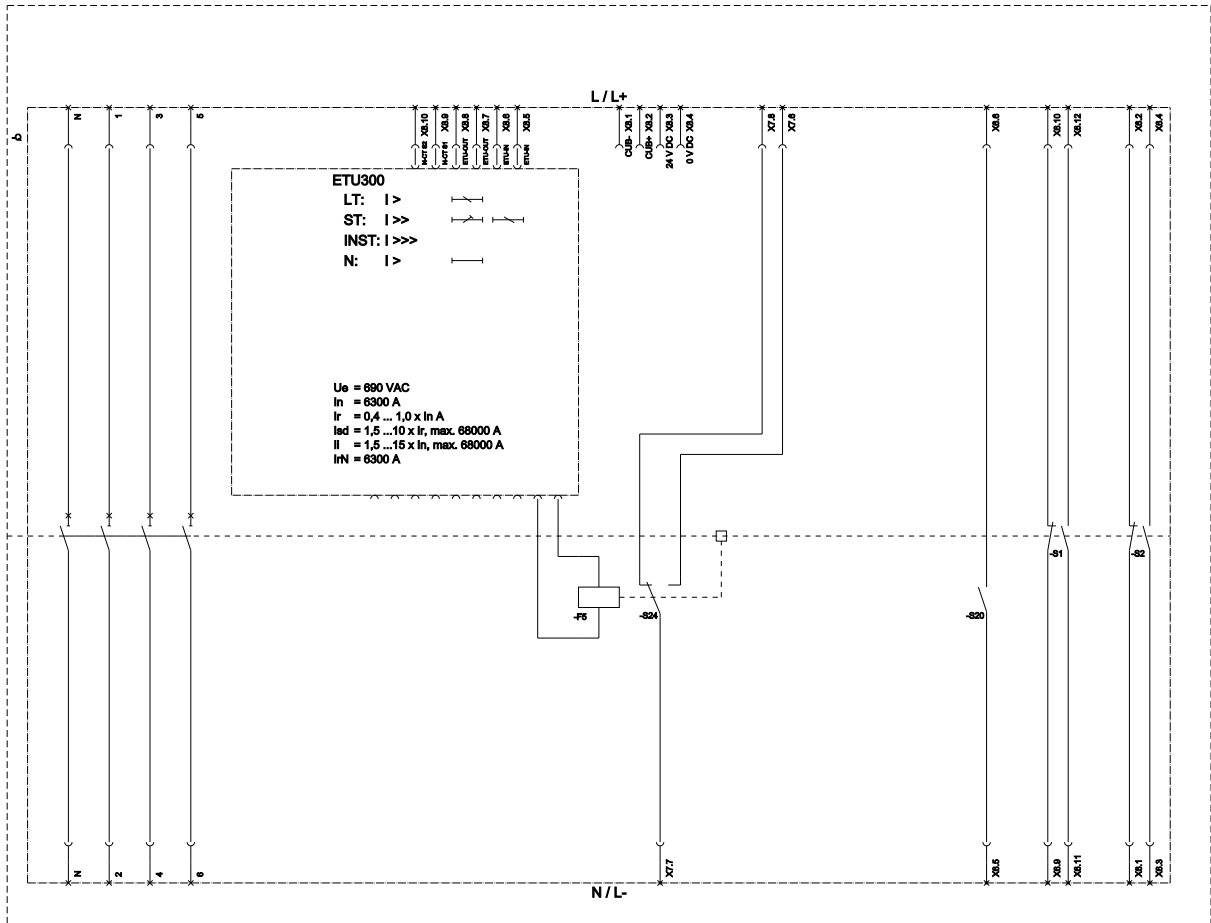

LT (Long Time Delay / Überspannung); ST (Short Time Delay / Kurzschlusschutz, kurzzeitverzögerter); INST (Instantaneous / Kurzschlusschutz, unverzögert); N (Neutral Protection / Neutralleiterüberwachung); GF (Ground Fault Protection / Erdlebensschutz);
 PS (Pluglock for trip unit / Auslöseverriegelung); S04 (TAS: In trip alarm switch / Reset position) / Reset Ausgibtaster (Auslöseposition); S1-S3 (AUX: Auxiliary switch / Hilfskontakt); S20 (RTCC: Ready to close signaling switch / Abschaltkontakt);
 FRS: position signaling switch module / Positionsmeldemodul

last modified:

11/30/2023

