

Product data sheet

Specifications



Modicon M172 Optimized and Performance expansion 12 I/Os

TM172E12R

Product availability: Stock - Normally stocked in distribution facility

Price*: 158.00 USD

Main

Range Of Product	Modicon M171/M172
Product Or Component Type	Additional I/O module
Product Specific Application	HVAC control
Total Inputs/Outputs	12
Discrete Input Number	2
Discrete Output Number	3 relay outputs SPST with same common
Discrete Output Current	3 A relay SPST
Analogue Input Number	4 configurable by pair

Complementary

Number Of Port	1 CAN port - screw terminal block
Input/Output Number	6 digital output 4 analog input 2 digital input
Discrete Input Logic	Positive logic (sink) up to 2 kHz
Discrete Input Voltage	24 V AC/DC
Discrete Input Current	2.5 mA AC/DC
Input Impedance	20 kOhm
Analogue Input Type	NTC NK103 Beta 3977 temperature probe - 40...137 °C 0.1 °C 10 kOhm at 25 °C) NTC 103AT-2 Beta 3435 temperature probe - 50...110 °C 0.1 °C 10 kOhm at 25 °C) current 0...20 mA 1 digit < 150 Ohm current 4...20 mA 1 digit < 150 Ohm voltage 0...10 V 1 digit > 10 kOhm voltage 0...5 V 1 digit > 20 kOhm absolute or ratiometric) impedance 0...1500 hOhm 1 hOhm 10 kOhm impedance 0...300 daOhm 1 daOhm 2 kOhm Pt 100/Pt 1000 PTC - 55...150 °C 0.1 °C 2 kOhm direct input 1 digit Dry contact) Pt 1000 temperature probe - 200...850 °C 0.1 °C 2 kOhm

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Measurement Accuracy	NTC NK103 - 40...+110 °C +/- 1 °C NTC NK103 110...137 °C +/- 1.9 °C NTC 103AT-2 - 50...110 °C +/- 1 °C PTC - 55...+135 °C +/- 1.1 °C PTC - 150...135 °C +/- 3.1 °C Pt 1000 - 200...-100 °C +/- 5 °C Pt 1000 - 100...-50 °C +/- 3 °C Pt 1000 - 50...+200 °C +/- 1.5 °C Pt 1000 200...600 °C +/- 15 °C Pt 1000 600...850 °C +/- 30 °C 0...20 mA 0...4 mA +/- 2 % of full scale +/- 1 digit 0...20 mA 4...20 mA +/- 1 % of full scale +/- 1 digit 4...20 mA +/- 1 % of full scale +/- 1 digit 0...10 V +/- 1 % of full scale +/- 1 digit 0...5 V +/- 1 % of full scale +/- 1 digit HOhm 0...700 hOhm +/- 10 hOhm HOhm 700 hOhm...1200 hOhm +/- 25 hOhm HOhm 1200 hOhm...1500 hOhm +/- 60 hOhm DaOhm 0...300 daOhm +/- 2.5 daOhm
Sensor Power Supply	5 V DC 50 mA 24 V DC 125 mA
[Us] Rated Supply Voltage	24 V +/- 10 % AC 20...38 V DC
Power Consumption In W	20 VA 24 V AC 10 W 24 V DC
Realtime Clock	Without clock
Display Type	Without Display
Overvoltage Category	II
Mounting Support	Panel mounting with accessory DIN rail
Width	2.83 in (72 mm)
Height	4.33 in (110 mm)
Depth	2.32 in (59 mm)
Net Weight	0.31 lb(US) (0.14 kg)

Environment

Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility
Standards	IEC 61000-4-11 EN 60068-2-6 Fc IEC 61000-4-5 EN 60730-2-9 EN 60730-1 IEC 61000-4-2 UL 60730-2-9 IEC 61000-4-4 CSA E60730-2-9 CAN/CSA-E60730-1 IEC 61000-4-3 EN 60068-2-27 UL94 (material V0)
Product Certifications	CE RCM cURus CSA EAC
Ambient Air Temperature For Operation	-4...149 °F (-20...65 °C) UL 60730-1
Ambient Air Temperature For Storage	-22...158 °F (-30...70 °C)
Relative Humidity	5...95 % non-condensing
Ip Degree Of Protection	IP20

Pollution Degree	2
------------------	---

Ordering and shipping details

Category	US1PC1222537
----------	--------------

Discount Schedule	PC12
-------------------	------

Gtin	3606481267610
------	---------------

Returnability	Yes
---------------	-----

Country Of Origin	IT
-------------------	----

Packing Units

Unit Type Of Package 1	PCE
------------------------	-----

Number Of Units In Package 1	1
------------------------------	---

Package 1 Height	5.31 in (13.500 cm)
------------------	---------------------

Package 1 Width	3.54 in (9.000 cm)
-----------------	--------------------

Package 1 Length	5.00 in (12.700 cm)
------------------	---------------------

Package 1 Weight	7.83 oz (222.000 g)
------------------	---------------------

Unit Type Of Package 2	S02
------------------------	-----

Number Of Units In Package 2	8
------------------------------	---

Package 2 Height	5.91 in (15.000 cm)
------------------	---------------------

Package 2 Width	11.81 in (30.000 cm)
-----------------	----------------------

Package 2 Length	15.75 in (40.000 cm)
------------------	----------------------

Package 2 Weight	4.42 lb(US) (2.005 kg)
------------------	------------------------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Resource performance

Upgradeable Through Digital Modules
And Upgraded Components

Well-being performance

Mercury Free

Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation [REACH Declaration](#)

Eu Rohs Directive Pro-active compliance (Product out of EU RoHS legal scope)

China Rohs Regulation [China RoHS declaration](#)

Environmental Disclosure [Product Environmental Profile](#)

Weee The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


Circularity Profile [End of Life Information](#)

California Proposition 65 **WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Dimensions Drawings


Dimensions

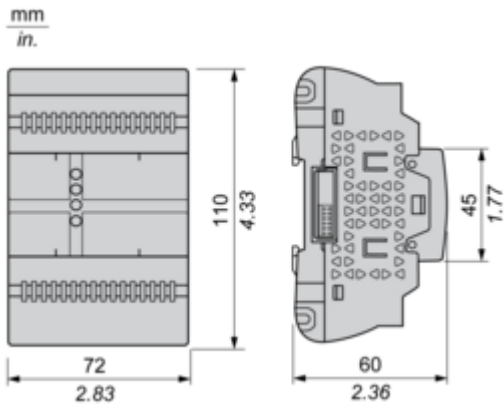


Mounting and Clearance

Mounting Positions


Correct Mounting Position

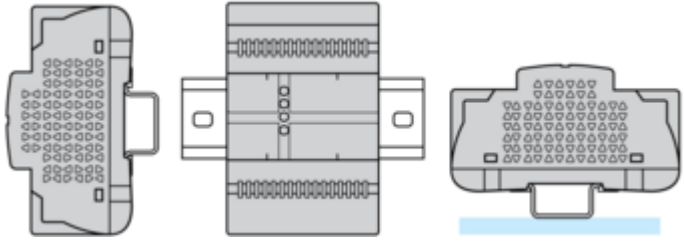

Incorrect Mounting Position

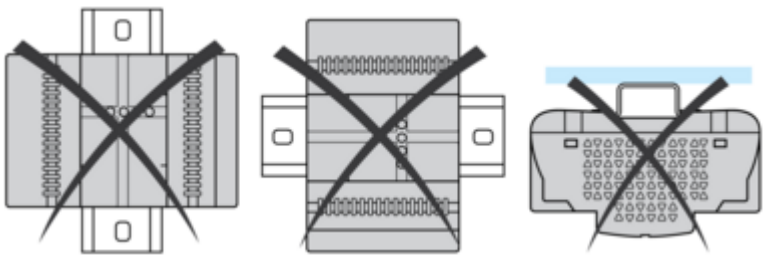


Clearance

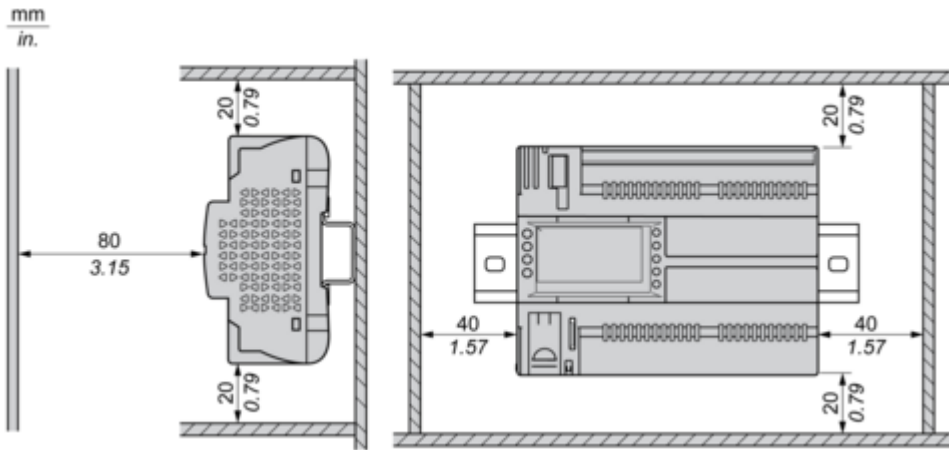


Connections and Schema


Power Supply

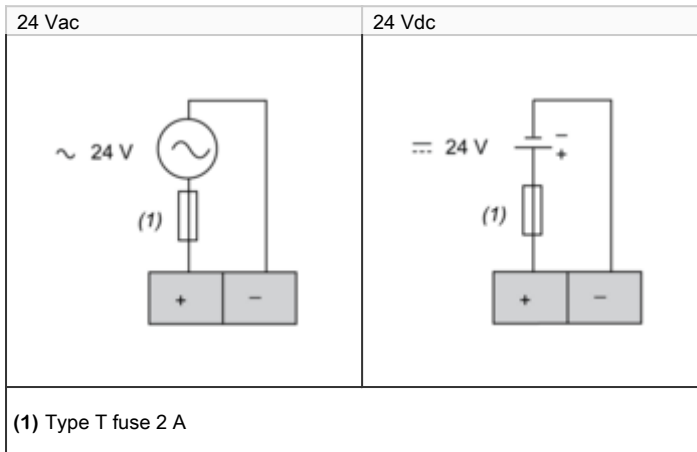


CN2 Fast Digital Inputs



CN5, CN4 High Voltage Relay SPST Digital Output

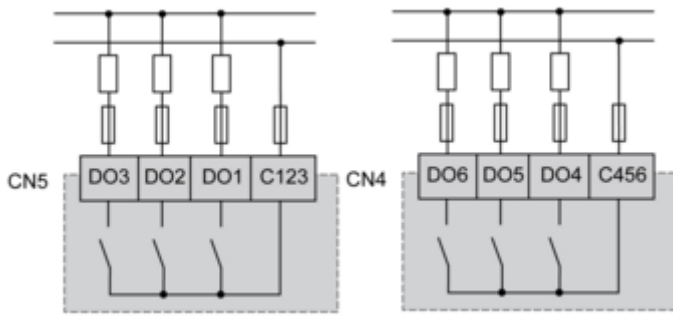

CN3 Analog Inputs

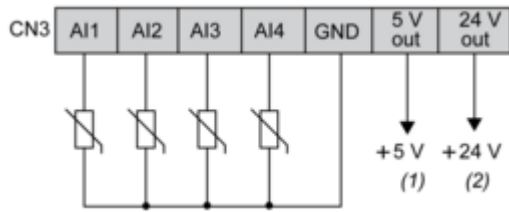

- (1) Max. current : 50 mA.
- (2) Max. current : 125 mA.

CN1 CAN Expansion Bus Port

